


Q-LOCK

FUNCTION	READER 3 EDGE CONNECTOR	'D' CONN	COLOUR	SIGNAL
SERVO OUT	EB20	1	RED	
SERVO REF	EB21	2	BLUE	
	EB22	3	GREEN	
PLAY ?	EB23	4	YELLOW	
STOP ?	EB24	5	WHITE	
RECORD ?	EB25	6	BLACK	
FORWARD ?	EB26	7	BROWN	
REWIND ?	EB27	8	VIOLET	
RUNOUT ?	EB28	9	ORANGE	
TALLY REF	EB29	10	PINK	
	EB30	11	TURQ	
Q-LOCK +5V	EB31	12	GREY	
SERVO CHD REF	EB32	13	RED/BLUE	
EXT SERVO	EA20	14	GREEN/RED	
Q-LOCK OV	EA21	15	YELLOW/RED	
PLAY !	EA22	16	WHITE/RED	
STOP !	EA23	17	RED/BLACK	
RECORD !	EA24	18	RED/BROWN	
FORWARD !	EA25	19	YELLOW / BLUE	
REWIND !	EA26	20	WHITE/BLUE	
SERVO ! / EDIT1	EA27	21	BLUE/BLACK	
COMMAND REF	EA28	22	ORANGE/BLUE	
TACH or DIR	EA29	23	YELLOW/GREEN	
TACH	EA30	24	WHITE /GREEN	
TACH REF	EA31	25	ORANGE/GREEN	

STUDER A810  
REMOTE CONNECTOR

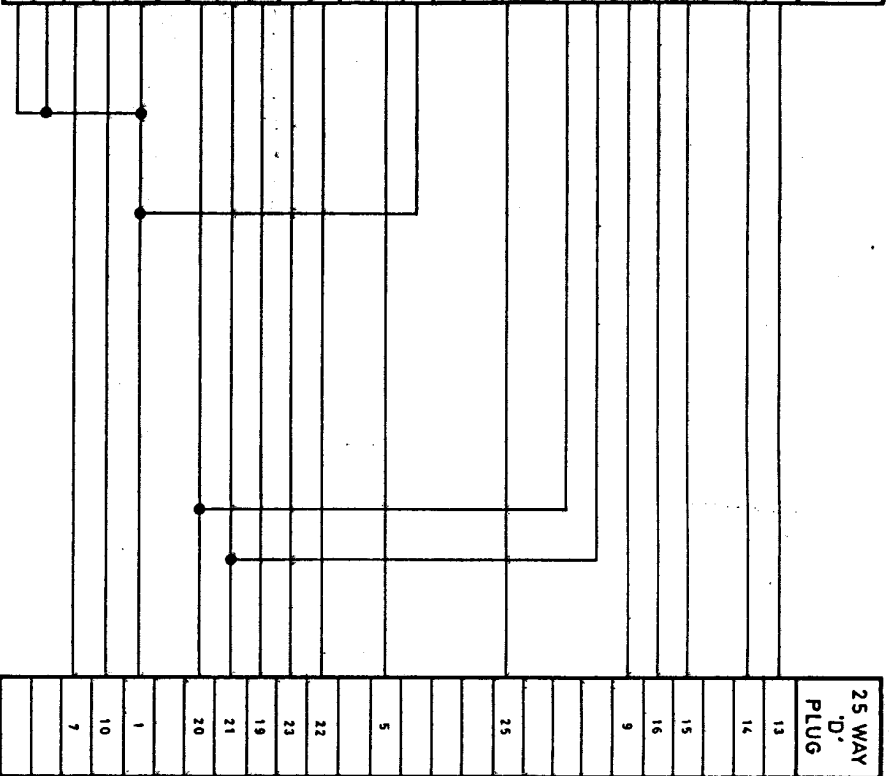


CONNECTOR 1

CABLE 1

CONNECTOR 2

NOTES:-	CONNECTOR SPECIFICATION	No. of WAYS	TYPE	LOCKING	CABLE SPEC.	No. of WAYS	LENGTH
	CONNECTOR 1	25	'D' SOCKET	SLIDE	CABLE 1	25	8m
	CONNECTOR 2	25	'D' PLUG	CLIP	CABLE 2		
	CONNECTOR 3				CABLE 3		
	CONNECTOR 4				CABLE 4		

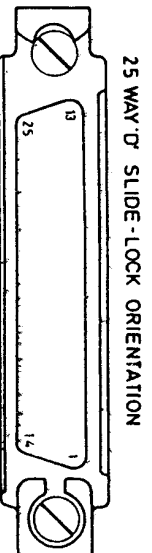

25 WAY 'D' SLIDE-LOCK ORIENTATION

KEY :- : indicates COMMAND  
? indicates TALLY

ISSUE	MODIFICATION	DATE



AUDIO KINETICS (UK) LTD  
KINETIC CENTRE  
THEOBALD STREET  
BOREHAMWOOD  
HERTS.

TITLE			
G.P INTERFACE CABLE DIAGRAM			
FOR :- STUDER A810			
USING EXTERNAL SERVO COMMAND			
DRAWN	DATE	CHKD.	DRAWING No.
JMW	6.1.84		A3/PI/AAQ 591 / 0111